

Project:	Type:
Date:	Comments:

GENERAL: Recessed, Philips Xitanium Driver

LED: Samsung LED Chips, 3000k/4000k/5000k, 80 ≤ CRI

OPTICAL: Direct Illumination, Beam Angle 107°

CONSTRUCTION: Aluminum, PC Cover

\* 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.



Model #	Wattage	Output Voltage	Current	Flux(lm)	Size (inches)	Intelligent Control	Finish
TechoLED-BBE-0212	23 W	33 V	700mA	3100lm	34.92x2.67x2.79	Non/1-10V/Dali	Silver/White/Black
TechoLED-BBE-0213	32 W	46 V	700mA	4400lm	45.15x2.67x2.79	Non/1-10V/Dali	Silver/White/Black
TechoLED-BBE-0214	39 W	28 V	1050mA	5200lm	58.54x2.67x2.79	Non/1-10V/Dali	Silver/White/Black
TechoLED-BBE-0215	32 W	46 V	700mA	4400lm	48x2.67x2.79	Non/1-10V/Dali	Silver/White/Black

### Ordering Guide



#### 1-FIXTURE ID

BBE-021

#### 2-LENGTH

34 - 34"  
44 - 44"  
48 - 48"  
58 - 58"  
C - Custom  
(specify length)

#### 3-COLOR TEMP

27 - 2700K  
30 - 3000K  
35 - 3500K  
40 - 4000K  
50 - 5000K  
D - Dynamic/  
Tunable White

#### 4-VOLTAGE

U - Universal  
(120/277V)

#### 5-DRIVER (INTEGRAL)

P - Philips Xitanium Series  
(standard)  
M - MeanWell  
O - Other

#### 6-FINISH

S - Silver  
W - White  
C - Custom Color (RAL#)

#### 7-MOUNTING

R - Recessed

#### 8-OPTICS

SD - Standard Diffuser


#### 9-OPTIONS

D - 0-10V Dimming  
DA - Dali  
M - Motion Sensor (remote)



#### 10-EMERGENCY

EM - Emergency Battery  
Backup, 90 minutes

Project:	Type:
Date:	Comments:

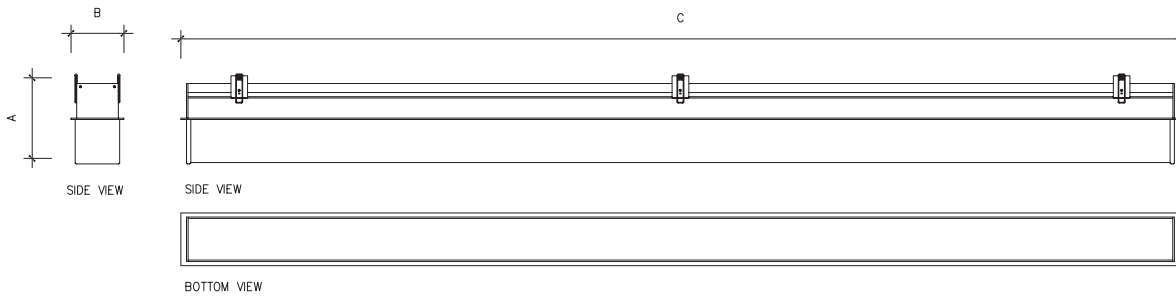

FIXTURE ID	A	B	C
BBE-0212	2.79	2.67	34.92
BBE-0213	2.79	2.67	45.15
BBE-0214	2.79	2.67	58.54
BBE-0215	2.79	2.67	48

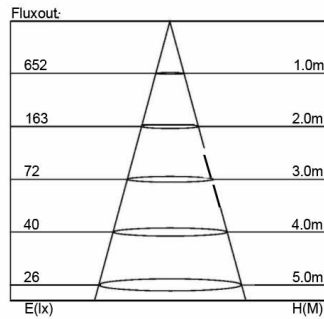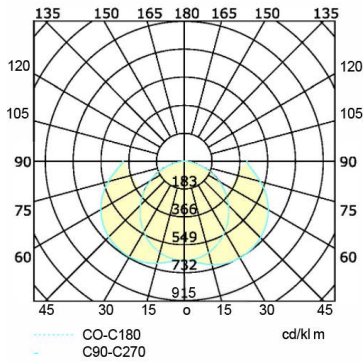

### Accessories

FB-003	Mounting Spring
--------	-----------------