

Project:	Type:
Date:	Comments:

GENERAL: Pendant, Indoor, Seamless Splice, Philips Xitanium Driver

LED: Samsung LED Chips, 3000k/4000k/5000k, 80 ≤ CRI, L80/60000h

OPTICAL: Direct Illumination, Beam Angle 110°, UGR ≤ 19

CONSTRUCTION: Aluminum, PMMA Cover

* 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.



Model #	Wattage	Output Voltage	Current	Flux(lm)	Size (inches)	Intelligent Control	Finish
TechoLED-BPE-0112	23 W	33 V	700mA	3100lm	34.6x2.36x3.14"	Non/1-10V/Dali	Silver/White/Black
TechoLED-BPE-0113	32 W	46 V	700mA	4400lm	44.84x2.36x3.14"	Non/1-10V/Dali	Silver/White/Black
TechoLED-BPE-0114	39 W	28 V	1050mA	5200lm	58.3x2.36x3.14"	Non/1-10V/Dali	Silver/White/Black
TechoLED-BPE-0115	32 W	46 V	700mA	4400lm	58.3x2.36x3.14"	Non/1-10V/Dali	Silver/White/Black

Ordering Guide



1-FIXTURE ID

BPE-011

2-LENGTH

34 - 34"
44 - 44"
48 - 48"
57 - 57"

C - Custom
(specify length)

3-COLOR TEMP

27 - 2700K
30 - 3000K
35 - 3500K
40 - 4000K
50 - 5000K
D - Dynamic/
Tunable White

4-VOLTAGE

U - Universal
(120/277V)

5-DRIVER (INTEGRAL)

P - Philips Xitanium Series
(standard)
M - MeanWell
O - Other

6-FINISH

W - White
B - Black
S - Silver
C - Custom Color (RAL#)

7-MOUNTING

AC - Aircraft Cable (50")

8-OPTICS

SD - Standard Diffuser


9-OPTIONS

D - 0-10V Dimming
DA - Dali
M - Motion Sensor (remote)



10-EMERGENCY

EM - Emergency Battery
Backup, 90 minutes

Project:	Type:
Date:	Comments:

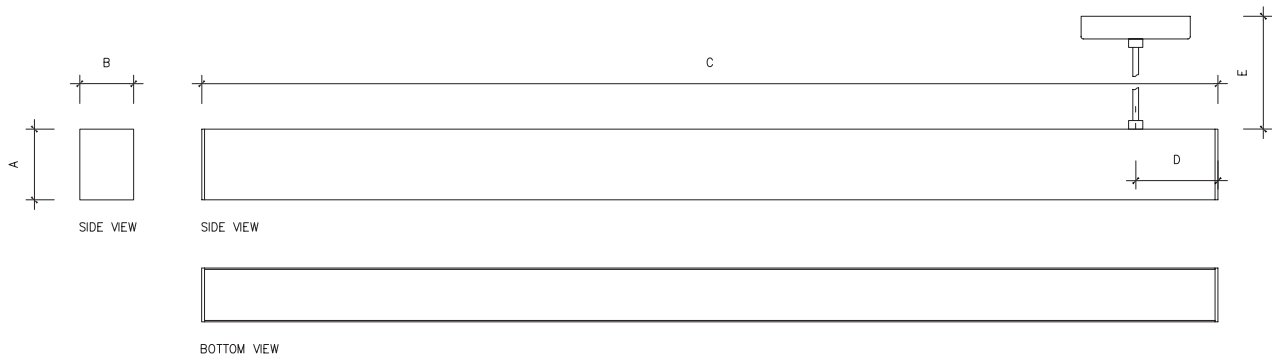

FIXTURE ID	A	B	C	D	E
BPE-0112	3.14"	2.38"	34.6"	3.62"	optional
BPE-0113	3.14"	2.38"	44.84"	3.62"	optional
BPE-0114	3.14"	2.38"	58.3"	3.62"	optional
BPE-0115	3.14"	2.38"	48"	3.62"	optional

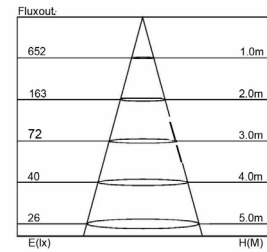

Accessories

FY-003	L Connector, 7W, 900lm, Integral Driver
FY-004	Tee Connector, 10W, 1300Lm, Integral Driver
FY-005	X Connector, 13W, 1700Lm, Integral Driver
FP-001	Continuous Run Connector

