

Project:	Type:
Date:	Comments:


GENERAL: Pendant, Philips Xitanium Driver

LED: Samsung LED Chips, 3000k/4000k/5000k, 80 ≤ CRI, L80/60000h

OPTICAL: Direct Illumination, Beam Angle 107°

CONSTRUCTION: Aluminum, PC Cover

* 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.

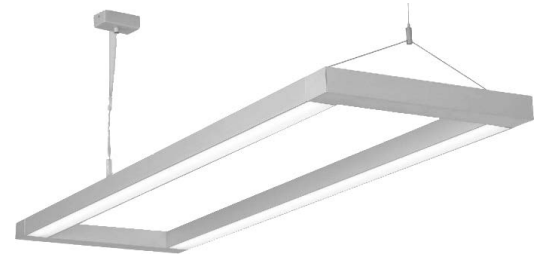

Model #	Wattage	Output Voltage	Current	Flux(lm)	Size (inches)	Intelligent Control	Finish
TechoLED-BPE-0342	47W	34V	1400mA	6300lm	38.38 x 14.76 x 1.49	Non 1-10V Dali	Silver/White/Black
TechoLED-BPE-0343	64W	48V	1400mA	8800lm	48.62 x 14.76 x 1.49	Non 1-10V Dali	Silver/White/Black
TechoLED-BPE-0344	77W	55V	1400mA	10300lm	62 x 14.76 x 1.49	Non 1-10V Dali	Silver/White/Black

Ordering Guide

1 2 3 4 5 6 7 8 9 10

1-FIXTURE ID

BPE-034

2-LENGTH

38 - 38"
48 - 48"
62 - 62"
C - Custom
(specify length)

3-COLOR TEMP

27 - 2700K
30 - 3000K
35 - 3500K
40 - 4000K
50 - 5000K
D - Dynamic/
Tunable White

4-VOLTAGE

U - Universal
(120/277V)

5-DRIVER (INTEGRAL)

P - Philips Xitanium Series
(standard)
M - MeanWell
O - Other

6-FINISH

S - Silver
W - White
C - Custom Color (RAL#)

7-MOUNTING

A - Aircraft Cable

8-OPTICS

SD - Standard Diffuser


9-OPTIONS

D - 0-10V Dimming
DA - Dali
M - Motion Sensor (remote)

10-EMERGENCY

EM - Emergency Battery
Backup, 90 minutes

Project:	Type:
Date:	Comments:

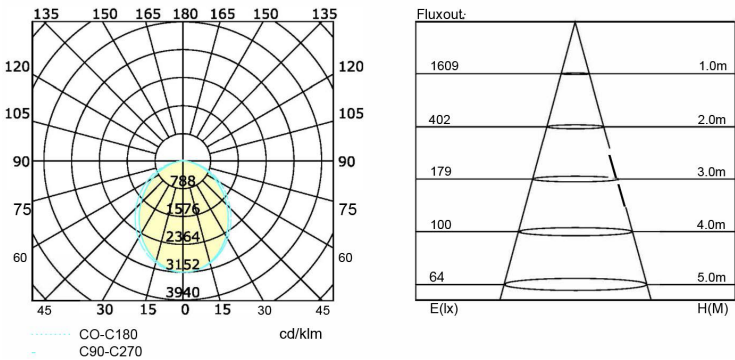

Accessories

FP-006	Ceiling Suspension Wire Member
FP-007	Wire Clamp
FP-009	Power Cable Junction Box