

Project:	Type:
Date:	Comments:


GENERAL: Pendant, Philips Xitanium Driver

LED: Samsung LED Chips, 3000k/4000k/5000k, 80 ≤ CRI, L80/60000h

OPTICAL: Direct/Indirect Illumination, Beam Angle 107°, UGR ≤ 19

CONSTRUCTION: Aluminum, PC Cover

\* 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.

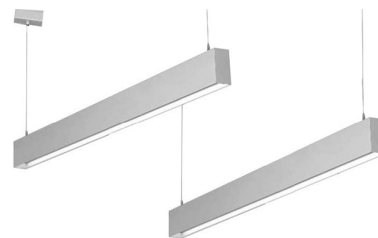

Model #	Wattage	Output Voltage	Current	Flux(lm)	Size (inches)	Intelligent Control	Finish
TechoLED-BPE-0362	34 W	48 V	700mA	4400lm	34.29x1.69x3.22	Non/1-10V/Dali	Silver/White/Black
TechoLED-BPE-0363	50 W	48 V	1050mA	6500lm	44.52x1.69x3.22	Non/1-10V/Dali	Silver/White/Black
TechoLED-BPE-0364	60 W	43 V	1400mA	7800lm	58.99x1.69x3.22	Non/1-10V/Dali	Silver/White/Black
TechoLED-BPE-0365	50 W	48 V	1050mA	6500lm	48x1.69x3.22	Non/1-10V/Dali	Silver/White/Black

### Ordering Guide



#### 1-FIXTURE ID

BPE-036

#### 2-LENGTH

34 - 34"  
44 - 44"  
48 - 48"  
58 - 58"

C - Custom  
(specify length)

#### 3-COLOR TEMP

27 - 2700K  
30 - 3000K  
35 - 3500K  
40 - 4000K  
50 - 5000K  
D - Dynamic/  
Tunable White

#### 4-VOLTAGE

U - Universal  
(120/277V)

#### 5-DRIVER (INTEGRAL)

P - Philips Xitanium Series  
(standard)  
M - MeanWell  
O - Other

#### 6-FINISH

S - Silver  
W - White  
C - Custom Color (RAL#)

#### 7-MOUNTING

AC - Aircraft Cable

#### 8-OPTICS

S - Standard Diffuser


#### 9-OPTIONS

D - 0-10V Dimming  
DA - Dali  
M - Motion Sensor (remote)



#### 10-EMERGENCY

EM - Emergency Battery  
Backup, 90 minutes

Project:	Type:
Date:	Comments:

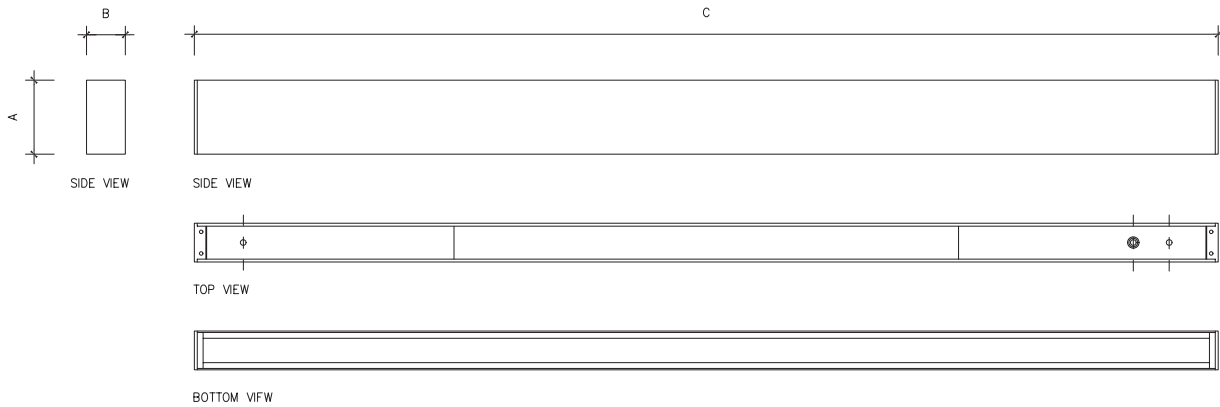

FIXTURE ID	A	B	C	D	E	F
BPE-0362	3.22	1.69	34.29	2.12	3.67	optional
BPE-0363	3.22	1.69	44.52	2.12	3.67	optional
BPE-0364	3.22	1.69	58.99	2.12	3.67	optional
BPE-0364	3.22	1.69	48	2.12	3.67	optional

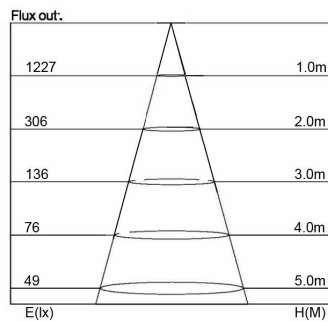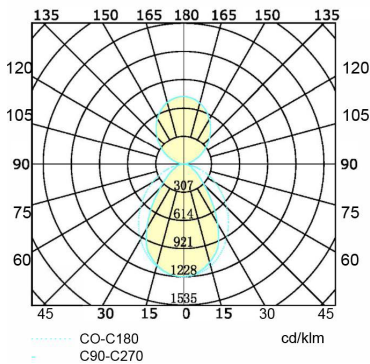

### Accessories

FP-006	Ceiling Suspension Wire Member
FP-007	Wire Clamp
FP-009	Power Cable Junction Box