

Project:	Type:
Date:	Comments:

GENERAL: Pendant, Seamless Splice, Philips Xitanium Driver

LED: Samsung LED Chips, 3000k/4000k/5000k, 80 ≤ CRI, L80/60000h

OPTICAL: Direct/Indirect Illumination, Beam Angle 65°, UGR ≤ 19

CONSTRUCTION: Aluminum, PMMA Cover, Cup Reflector

* 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.



Model #	Wattage	Output Voltage	Current	Flux(lm)	Size (inches)	Intelligent Control	Finish
TechoLED-BPE-7112	31 W	30 V	1050mA	3690lm	34.13x2.75x3.93	Non/1-10V/Dali	Silver/White/Black
TechoLED-BPE-7113	52 W	59 V	1050mA	7381lm	44.37x2.75x3.93	Non/1-10V/Dali	Silver/White/Black
TechoLED-BPE-7114	52 W	59 V	1050mA	7381lm	48x2.75x3.93	Non/1-10V/Dali	Silver/White/Black

Ordering Guide



1-FIXTURE ID

BPE - 711

2-LENGTH

34 - 34"
44 - 44"
48 - 48"

C - Custom
(specify length)

3-COLOR TEMP

27 - 2700K
30 - 3000K
35 - 3500K
40 - 4000K
50 - 5000K
D - Dynamic/
Tunable White

4-VOLTAGE

U - Universal
(120/277V)

5-DRIVER (INTEGRAL)

P - Philips Xitanium Series
(standard)
M - MeanWell
O - Other

6-FINISH

S - Silver
W - White
B - Black
C - Custom Color (RAL#)

7-MOUNTING

AC - Aircraft Cable

8-OPTICS

C - Cup Diffuser


9-OPTIONS

D - 0-10V Dimming
DA - Dali
M - Motion Sensor (remote)

10-EMERGENCY

EM - Emergency Battery
Backup, 90 minutes

Project:	Type:
Date:	Comments:

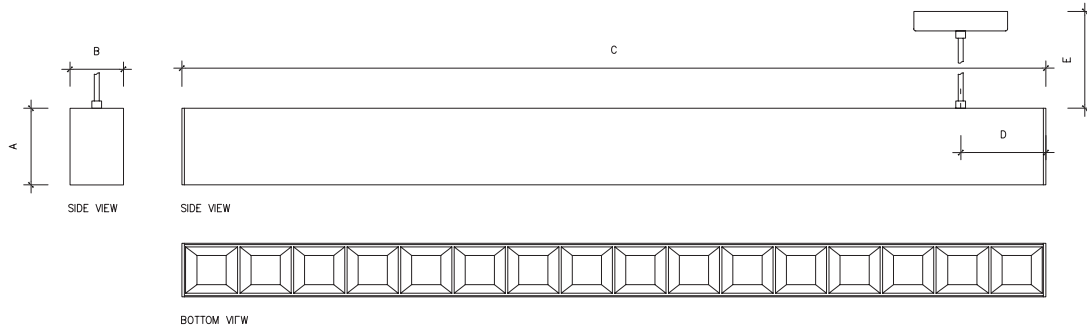

FIXTURE ID	A	B	C
BPE-7112	3.93	2.75	34.13
BPE-7113	3.93	2.75	44.47
BPE-7114	3.93	2.75	48

Accessories

FB-012	Corner Module, 19W, 2300Lm, LED Driver Inside
FB-013	Tee Module, 19W, 2300Lm, LED Driver Inside
FB-014	Cross Module, 19W, 2300Lm, LED Driver Inside
FB-020	Linear Connector