

Project:	Type:
Date:	Comments:

GENERAL: Surface Mounted

LED: Samsung LED Chips, 3000k/4000k/5000k, 80 ≤ CRI, L80/60000h

OPTICAL: Direct Illumination, Beam Angle 107°

CONSTRUCTION: Aluminum, PC Cover

* 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.



Model #	Wattage	Output Voltage	Current	Flux(lm)	Size (inches)	Intelligent Control	Finish
TechoLED-BYE-0212	23W	33V	700mA	3100lm	34.21 x 1.88 x 3.54	Non 1-10V Dali	Silver/White/Black
TechoLED-BYE-0213	32W	46V	700mA	4400lm	44.44 x 1.88 x 3.54	Non 1-10V Dali	Silver/White/Black
TechoLED-BYE-0214	39W	28V	1050mA	5200lm	57.83 x 1.88 x 3.54	Non 1-10V Dali	Silver/White/Black
TechoLED-BYE-0215	32W	46V	700mA	4400lm	48 x 1.88 x 3.54	Non 1-10V Dali	Silver/White/Black

Ordering Guide



1-FIXTURE ID

BYE-021

2-LENGTH

34 - 34"
44 - 44"
48 - 48"
57 - 57"
C - Custom
(specify length)

3-COLOR TEMP

27 - 2700K
30 - 3000K
35 - 3500K
40 - 4000K
50 - 5000K
D - Dynamic/
Tunable White

4-VOLTAGE

U - Universal
(120/277V)

5-DRIVER (INTEGRAL)

P - Philips Xitanium Series
(standard)
M - MeanWell
O - Other

6-FINISH

S - Silver
W - White
C - Custom Color (RAL#)

7-MOUNTING

S - Surface Mount

8-OPTICS

SD - Standard Diffuser


9-OPTIONS

D - 0-10V Dimming
DA - Dali
M - Motion Sensor (remote)



10-EMERGENCY

EM - Emergency Battery
Backup, 90 minutes

Project:	Type:
Date:	Comments:

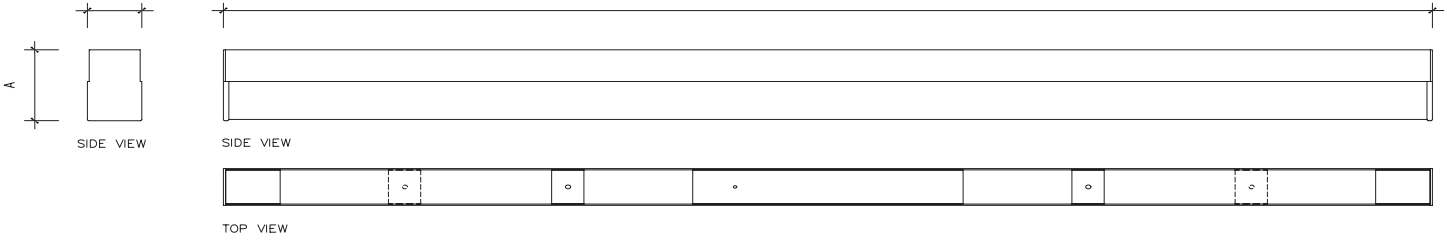

FIXTURE ID	A	B	C
BYE-0212	3.54	1.88	34.21
BYE-0213	3.54	1.88	44.44
BYE-0214	3.54	1.88	57.83
BYE-0215	3.54	1.88	48

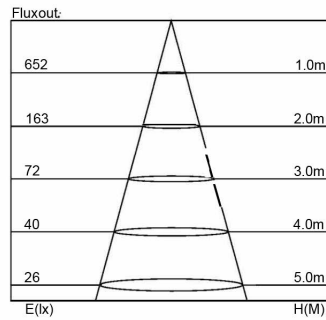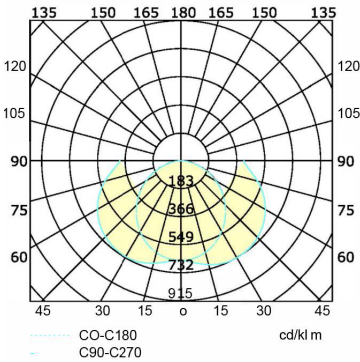

Accessories

FY-001	Bracket
--------	---------