

Project:	Type:
Date:	Comments:

FEATURES:

Outstanding Heat Dissipation
4 Kinds of Mounting Methods
Easy Installation

LISTINGS:

DLC Listed for Wet Location
ETL Listed / IP65 Rated

PERFORMANCE:

Rated Lifetime L70: 60,000 hours
0-10V Dimming or Photocell
Power Factor > 0.90
THD < 20%

THERMAL:

-33°C to 55°C Operating Temperature
-20°C to 77°C Storage Temperature

CONSTRUCTION:




Diecast Aluminum Body with Durable Powder Coat Finish
Durable, UV Stabilized Polycarbonate Lens

APPLICATIONS:

Street Lighting
Building Facades
Parking Lots
Area Lighting



Model #	Wattage	Voltage	Lumens Output	LED CHlps	Driver	Fixture Size	Carton Size	PCS/CTN	Gross Weight
TechoLED-SHBX100	100W	100-277V AC	1300lm	Philips 3030	Inventronics	21.65x12.59x3.14"	23.81x14.56x5.31"	1	6.9kgs
TechoLED-SHBX150	150W	100-277V AC	19500lm	Philips 3030	Inventronics	21.65x12.59x3.14"	23.81x14.56x5.31"	1	6.9kgs
TechoLED-SHBX200	200W	100-277V AC	26000lm	Philips 3030	Inventronics	21.65x12.59x3.14"	23.81x14.56x5.31"	1	8.6kgs
TechoLED-SHBX300	300W	100-277V AC	39000lm	Philips 3030	Inventronics	21.65x12.59x3.14"	23.81x14.56x5.31"	1	9.88kgs

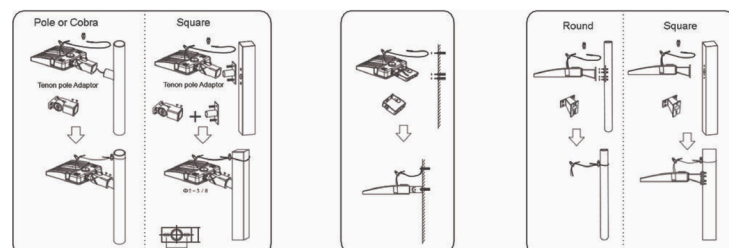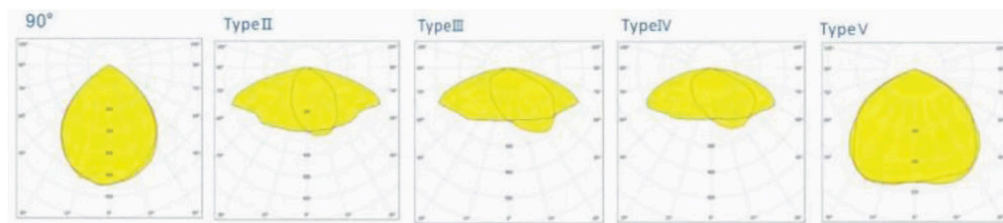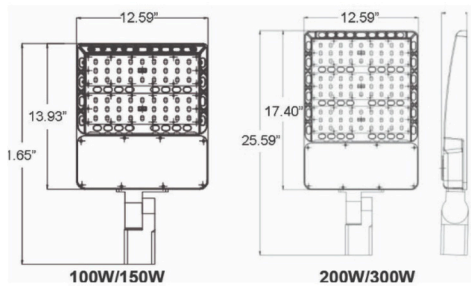

As we continue to innovate and improve our products, we reserve the right to edit, modify, and change our technical documentation.