

Project:	Type:
Date:	Comments:

Modular Design, allows for full customization of fixture size and color, wattage, lumen output and color temperature

Shallow height, suitable for low depth ceiling


Available in high efficacy - 137lm/w; and high CRI - 92+ versions

Power Factor: 0.9

100-277V input voltage

Latest generation Samsung LED chips

Recommended drivers - Meanwell LPF Series

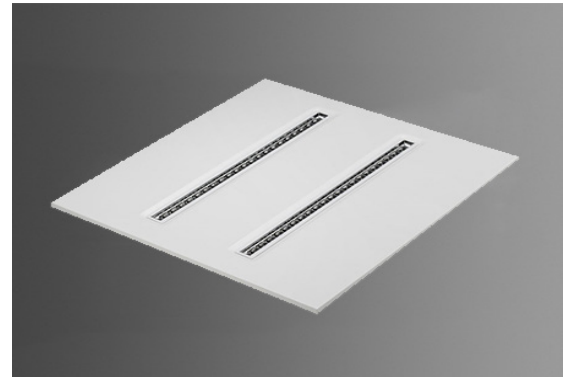

\* 5-year warranty, 50,000 hour rated lifespan, IP20 (indoor). Custom size, lumen output and color temperature available

Model #	Size	Wattage	CCT	Efficacy	CRI
TechoLED-2x2-MP-28-U-30-D-L-W-HE	2x2	28W	3000k	137lm/w	80+CRI
TechoLED-2x2-MP-28-U-40-D-L-W-HE	2x2	28W	4000k	137lm/w	80+CRI
TechoLED-2x2-MP-28-U-50-D-L-W-HE	2x2	28W	5000k	137lm/w	80+CRI
TechoLED-2x2-MP-28-U-30-D-L-W-C	2x2	28W	3000k	110lm/w	90+CRI
TechoLED-2x2-MP-28-U-40-D-L-W-C	2x2	28W	4000k	110lm/w	90+CRI
TechoLED-2x2-MP-28-U-50-D-L-W-C	2x2	28W	5000k	110lm/w	90+CRI

Ordering  
Guide

1 2 3 4 5 6 7 8 9

### 1-FIXTURE ID

MP - Modular Panel

### 2-SIZE

2x2 - 2x2"  
C - Custom

### 3-WATTAGE

28 - 28W  
C - Custom

### 4-COLOR TEMPERATURE

27 - 2700K  
30 - 3000K  
35 - 3500K  
40 - 4000K  
50 - 5000K

D - Dynamic/Tunable White

### 5-EFFICACY/CRI

HE - High Efficacy,  
137lm/W at 80+CRI

HC - High CRU - 110lm/W  
at 92+CRI

### 6-FINISH

W - White  
B - Black  
CC - Custom Color  
(provide RAL#)

### 7-MOUNTING

L - Lay in grid ceiling  
P - Pendant (aircraft cable)  
S - Surface Mount

### 8-OPTICS


SD - Standard Diffuser  
M - Modified Diffuser

### 9-EMERGENCY

EM - Emergency Battery  
Backup, 90 minutes

As we continue to innovate and improve our products, we reserve the right to edit, modify, and change our technical documentation.

Project:	Type:
Date:	Comments:

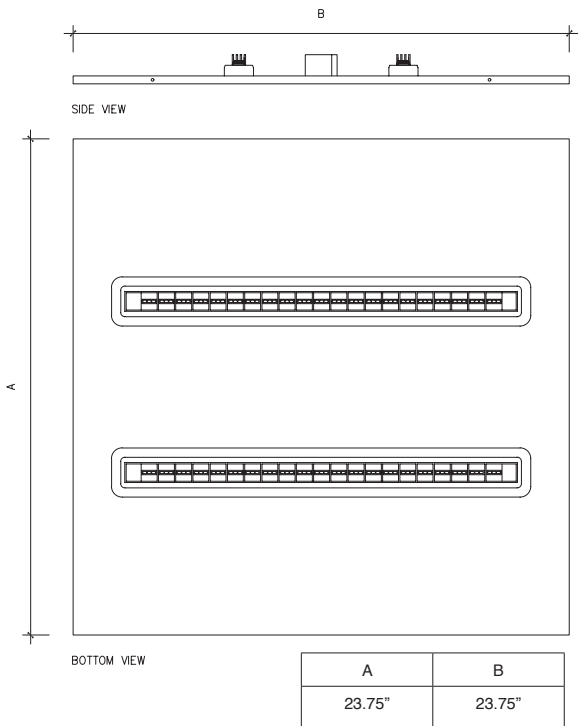

Accessories

S	Surface Mount Kit
P	Pendant Hanging Kit