

Project:	Type:
Date:	Comments:

PERFORMANCE SUMMARY:

- Efficacy: 105LPW
- Delivered Light Output: 4200 Lumens
- Input Power: 40Watts
- CRI: Ra>80
- DLC Listed CCT Options: 3500K/4000K/5000K
- Input Voltage: 100-277V AC
- Input current: 0.43A
- THD: <20%
- Power Factor: >0.9
- Driver: Internal & Replaceable
- Driver output: DC30-42V, 0.88A
- Standard Warranty: 5 Years
- Standard Lifetime: Designed to L70 minimum 50,000 hours
- Mounting: Pendant
- Support to connect 9pcs panels together in 120V AC
- Available 0-10v dimming and step dimming (100%, 50%, 10%)
- Optional function: Dynamic/tunable white
- Signal Current: <2mA
- Recommended Dimmers: DIVA-DVTV (LUTRON), IP-710-DL (LEVITON)
- Dimensions: L 47.24" x W 7.87" x H 0.94"



CERTIFICATIONS:

- ETL: Yes
- DLC: Yes
- LM79 Report: Yes
- Damp Location Rated: Yes

Ordering Guide

1	2	3	4	5	6
---	---	---	---	---	---

1-FIXTURE ID	2-LENGTH	3-DIMMING	4-WATTAGE	5-COLOR TEMPERATURE
TP - Transparent Panel	4 - 4 feet 8 - 8 feet	D - 0-10V Dimming	40 - 40W 80 - 80W	3 - 3000K 35 - 3500K 4 - 4000K 5 - 5000K
6-CRI				
80 - 80CRI 90 - 90CR				

Zonal Lumen Tabulation



Zonal Lumen	0-30	0-40	0-60	60-90	70-100	90-120	0-90	90-180	0-180
Lumens	433.6	755.0	1,551.3	720.3	369.5	547.7	2,271.6	1,892.9	4,254.5
%Luminaire	10.2%	17.7%	36.5%	16.9%	8.7%	12.9%	53.4%	46.6%	100%

Project:	Type:
Date:	Comments:

Lumens Per Zone

Zonal Lumen	0-10	10-20	20-30	30-40	40-50	50-60	60-70	70-80	80-90
Lumens	49.0	145.9	238.7	321.4	384.0	412.3	383.6	266.8	69.8
%Luminaire	1.2%	3.4%	5.6%	7.6%	9.0%	9.7%	9.0%	6.3%	1.6%

Zonal Lumen	90-100	100-110	110-120	120-130	130-140	140-150	150-160	160-170	170-180
Lumens	32.9	186.5	328.3	382.2	359.3	296.7	218.7	133.5	44.9
%Luminaire	0.8%	4.4%	7.7%	9%	8.4%	7%	5.1%	3.1%	1.1%

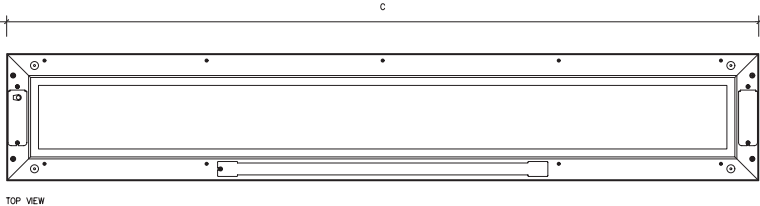

FIXTURE ID	A	B	C
TP-4-D-40-3-80	optional	7.87"	47.24"
TP-4-D-80-4-80	optional	7.87"	94.48"

