

Project:	Type:
Date:	Comments:

FEATURES & BENEFITS

Shallow height, less than 3 inches deep including the junction box, suitable for low depth ceiling

High quality aluminum frame

PMMA Diffuser

Power Factor: 0.9

50000m hour lifetime

80 or 90 (optional) CRI

Full Photometric & IES Files

Custom Fixture Sizes

Custom Trim Shapes

2700k to 5000k

Remote controlled Dynamic White

Recommended Drivers - Meanwell LPF Series; Lifud LF Series

** 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.*



Model #	Size	Wattage	CCT	Lumens	Efficacy
TechoLED-2x2-25-U-30-D-L-W	2x2	25W	3000k	3125	125lm/W
TechoLED-2x2-25-U-40-D-L-W	2x2	25W	4000k	3125	125lm/W
TechoLED-2x2-25-U-50-D-L-W	2x2	25W	5000k	3125	125lm/W
TechoLED-2x4-40-U-30-D-L-W	2x4	40W	3000k	5000	125lm/W
TechoLED-2x4-40-U-40-D-L-W	2x4	40W	4000k	5000	125lm/W
TechoLED-2x4-40-U-50-D-L-W	2x4	40W	5000k	5000	125lm/W
TechoLED-1x4-40-U-30-D-L-W	1x4	40W	3000k	5000	125lm/W
TechoLED-1x4-40-U-40-D-L-W	1x4	40W	4000k	5000	125lm/W
TechoLED-1x4-40-U-50-D-L-W	1x4	40W	5000k	5000	125lm/W

Project:	Type:
Date:	Comments:

Ordering Guide

1

2

3

4

5


6

7

8

9

1-FIXTURE ID	2-SIZE	3-WATTAGE	4-VOLTAGE	5-COLOR TEMPERATURE
TechoLED	2x2 - 2x2' 2x4 - 2x4' 1x4 - 1x4' 1x1 - 1x1' C - Custom	25 - 25W 40 - 40W C - Custom	U - 100-277V	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K C - Custom D - Dynamic/Tunable White (remote controlled)
6-DIMMING	7-MOUNTING	8-FINISH	9-EMERGENCY	
D - 0-10V Dimming N - None	L - Lay in Grid Ceiling P - Pendant S - Surface Mount	W - White (Standard) B - Black S - Silver CC - Custom Color (provide RAL#)	EM - Emergency Battery Backup (90 minutes)	

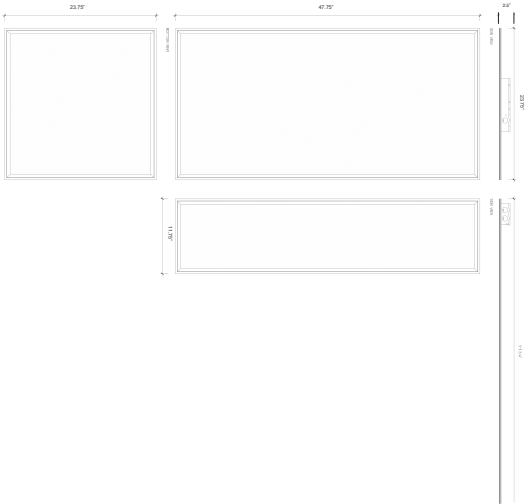

Accessories

Surface Mount Kit	Pendant Hanging Kit
-------------------	---------------------

As we continue to innovate and improve our products, we reserve the right to edit, modify, and change our technical documentation.