

Project:	Type:
Date:	Comments:

LISTING: ETL, DLC Listed

PERFORMANCE: Rated Lifetime L70: 50,000hours, 3000K - 5000K CT, CRI: 80



ELECTRICAL: Input Voltage 100-277V, Dimmable Power Supply 1-20V, Driver Efficiency >90%, Power Factor > 0.95, THD < 15%

CONSTRUCTION: Lightweight Construction Allows For Quick and Easy Installation, Aluminum Alloy Heatsink for Cooler Operating Temperatures, -35°C ~ 55°C Operating Temperature, -20°C~70° Storage Temperature

* IP65, 5 Year Warranty



Model #	Wattage	Lumens	LPW	CCT	CRI	Dimming	Input	DLC
TechoLED- MXHB100(BH)	100W	16000	160	3000k - 5000k	80+	0-10V	100-277V	Yes
TechoLED-MXHB150(BH)	150W	24000	160	3000k - 5000k	80+	0-10V	100-277V	Yes
TechoLED-MXHB200(BH)	200W	32000	160	3000k - 5000k	80+	0-10V	100-277V	Yes

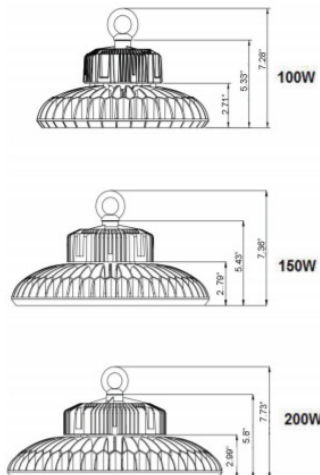

ITEM	100W	150W	200W
Outer Carton (L*W*H)	12.2 x 12.2 x 7.48	15.35 x 15.35 x 7.87	17.32 x 17.32 x 7.87
N.W. (lbs)	7.05	10.38	13.61
G.W. (lbs)	8.8	12.7	9.9
QTY/CTN	1	1	1

As we continue to innovate and improve our products, we reserve the right to edit, modify, and change our technical documentation.