
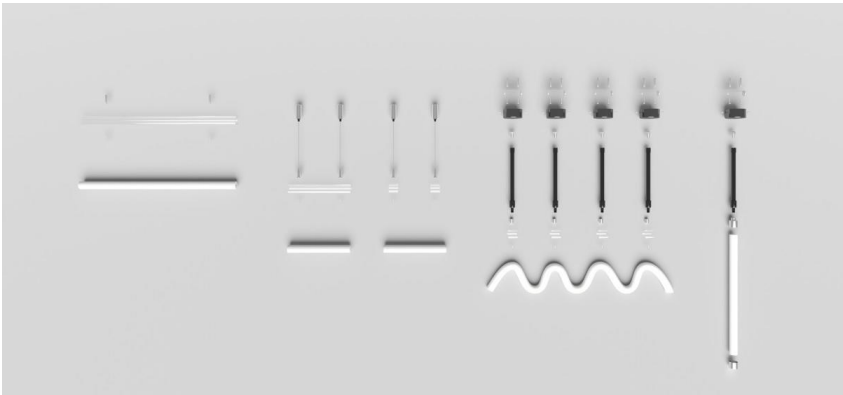


Project:	Type:
Date:	Comments:

Flexible extruded-silicone lighting system, with smooth 360° illumination. Easy to install, field cuttable and pliable. Indoor & outdoor versions available.

- 24V DC - Remote Driver
- 0.98" Diameter
- Pendant (Aircraft Cable or Stem) or Surface Mount installation
- 80/90/95CRI available
- 2700-6000K
- 5.85W/FT
- 0.244A/FT
- Silicone or Metal End Caps (IP67/IP20 respectively)
- Ships in 16.4' Reels

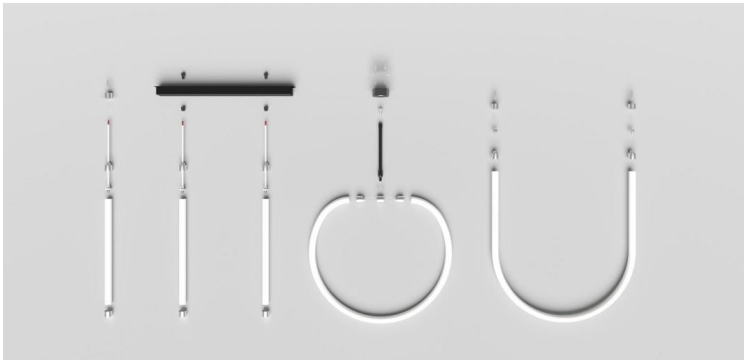

Model #	Diameter	Wattage	Distribution	Lumen Output (standard colors)
TECHOLED-FLX	0.98"	5.85W/FT	360°	2700K - 516LM/FT / 3000K - 555LM/FT / 4000K - 585LM/FT

Project:	Type:
Date:	Comments:

Ordering Guide

1

2

3

4

5

6

7


8

9


10

1-FIXTURE ID	2-LENGTH	3-COLOR TEMPERATURE	4- VOLTAGE	5- END CAPS
TECHOLED-FLX	X - Field Cuttable (specify length)	27 - 2700K 30 - 3000K 40 - 4000K 50 - 5000K D - Dynamic/Tunable White (not field cuttable) RGB - RGB (not field cuttable)	24 - 24VDC	S - Silicone (IP67) M - Metal (IP20)
6- MOUNTING	7- DIMMING			
PA - Pendant (Aircraft Cable) PS - Pendant (Stem) S - Surface Mounted	D - 0-10V Dimming D1% - Dimming down to 1% (fade to black) BM - Bluetooth Mesh Smart Wireless Control by BubblyNet			

Photometrics

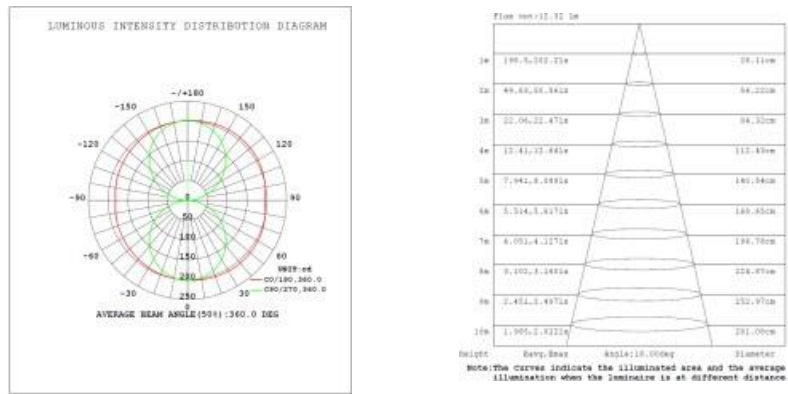


Dimensions




Project:	Type:
Date:	Comments:

Installation and Accessories

Horizontal Pendant - Aircraft Cables

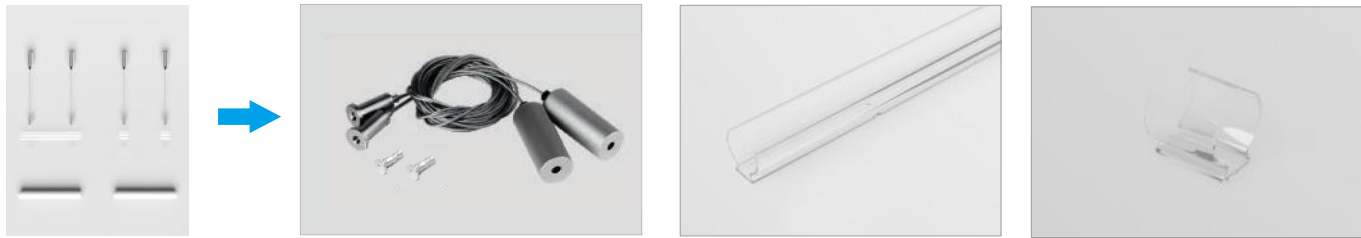


Horizontal Pendant - Stem

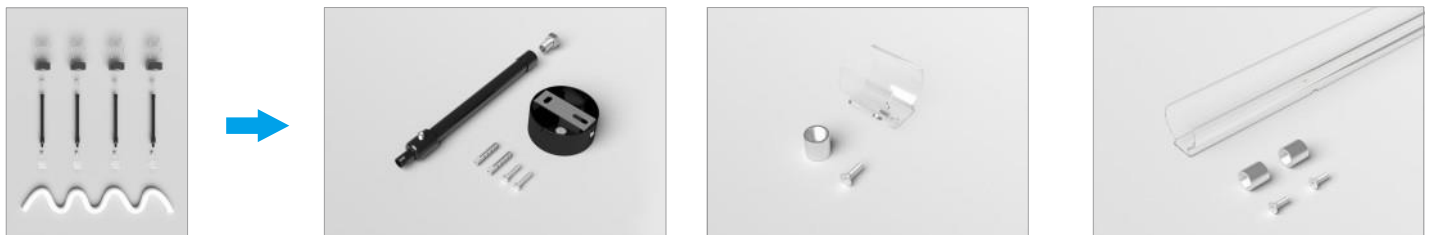

Vertical Ceiling Mounted



Surface Mounted

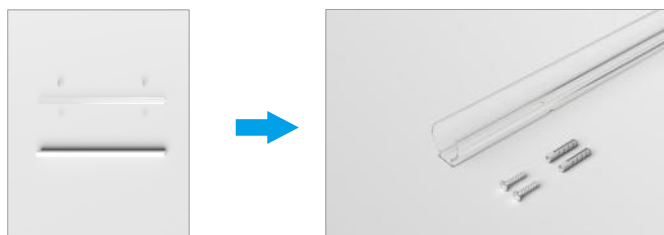

Project:	Type:
Date:	Comments:

