

Project:	Type:
Date:	Comments:




GENERAL: Indoor Recessed Architectural LED Fixture.

LED: Samsung LED Chips, 2700-5000K, Dynamic White and RGBW Available, 80CRI (90/95 optional)


OPTICAL: Direct Illumination, 110° Beam Angle, UGR<19

CONSTRUCTION: High Grade Aluminum Extrusion, Die Cast End Caps, PMMA Diffuser, Powder Coat Finish. Continuous Linear runs and X, T, L Lit Corners Available for Smooth, Seamless Patterns

** 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.*

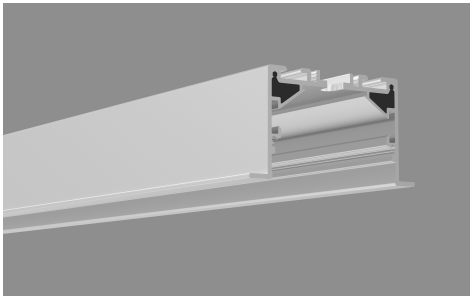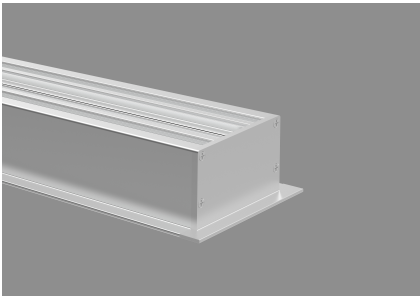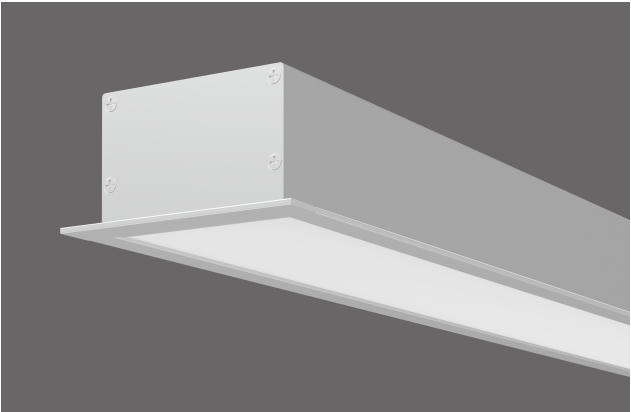

Model #	Length	Wattage	Distribution	Lumen Output
TechoLED-RF-3-D-4-30-30-U-D	4ft	30W	Direct	2600lm
TechoLED-RF-3-D-6-45-30-U-D	6ft	45W	Direct	4050lm
TechoLED-RF-3-D-8-60-30-U-D	8ft	60W	Direct	5400lm

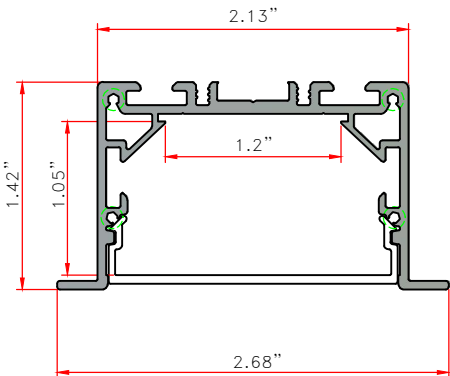


Project:	Type:
Date:	Comments:

Ordering Guide	1	2	3	4	5	6	7	8	9	10
----------------	---	---	---	---	---	---	---	---	---	----


1-FIXTURE ID	2-DISTRIBUTION	3-LENGTH	4-WATTAGE	5-COLOR TEMPERATURE		
RF-3	D - Direct	4 - 4ft 6 - 6ft 8 - 8ft C - Custom	30 - 30W _(2600lm) 45 - 45W _(4050lm) 60 - 60W _(5400lm) C - Custom	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K D - Dynamic/Tunable White DT - Lutron Digital T-Series Dynamic/Tunable white driver RGB - RGB RGBW - RGBW		
6-VOLTAGE	7-FINISH	8-MOUNTING	9-DRIVER OPTIONS	10-OPTIONS	11-OPTIONS (CONT.)	
U - Universal 110-277V HV - 347V	S - Silver W - White B - Black C - C (RAL#)	R - Recessed TG - Recessed in T Grid Ceiling	D - 0-10V Dimming DA - Dali LDE1 - Lutron Hi-lume 1% EcoSystem, Soft-on, Fade- to-Black dimming	DFCSJ-OEM-RF - Lutron Vive In-Fixture control (RF only) FCJ/FCJS-ECO - Lutron wireless PowPak (EcoSys- tem) FCJ/FCJS-010 - Lutron RF PowPak (0-10V) DFCSJ-OEM-OCC - Lutron Vive In-Fixture control (with daylight & occ/vac sensors)	EM - Emergency Battery Backup (remote) M - Motion Sensor (remote) BM - Bluetooth Mesh Smart Wireless Control by BubblyNet	

Photometrics

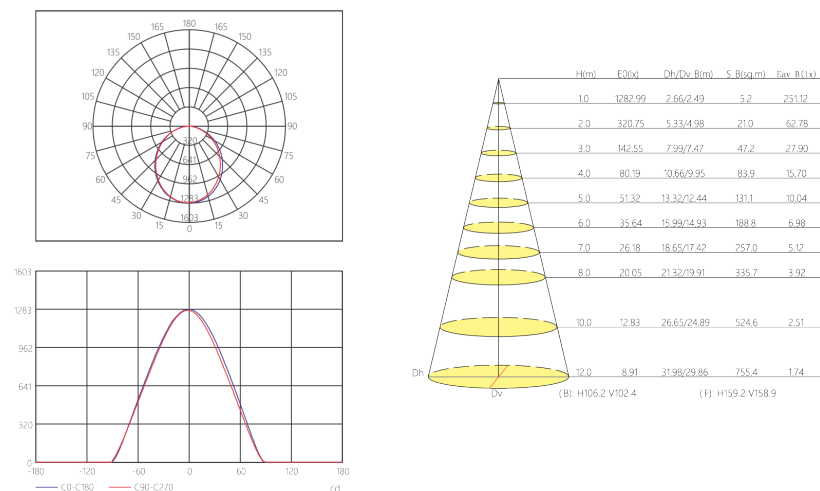


Project:	Type:
Date:	Comments:

Construction breakdown

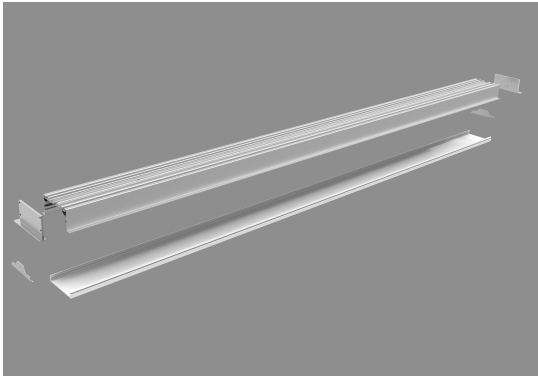

End Cap detail

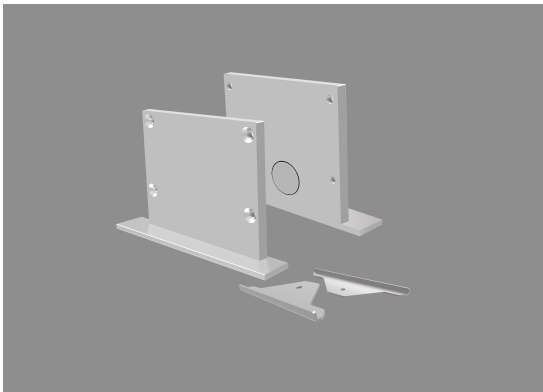

Connectors

RF-3-L	L shape connector (lit)
RF-3-T	T shape connector (lit)
RF-3-X	X shape connector (lit)
RF-3-C	Continuous linear run connector
RF-3-IN	Inner Corner Connector (lit)
RF-3-OUT	Out Corner Connector (lit)
RF-3-RG001	T Grid Ceiling

