

Project:	Type:
Date:	Comments:






GENERAL: Indoor Architectural LED Fixture. Pendant, Surface, Wall Mounted & Recessed Installation.

LED: Samsung LED Chips, 2700-5000K, Dynamic White and RGBW Available, 80CRI (90 optional)

OPTICAL: Direct & Direct/Indirect Configurations, 110° Beam Angle, UGR<19

CONSTRUCTION: High Grade Aluminum Extrusion, Die Cast End Caps, PMMA Diffuser, Integral Driver, Powder Coat Finish. X, T, L Lit Corners Available for Smooth, Seamless Patterns

** 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.*

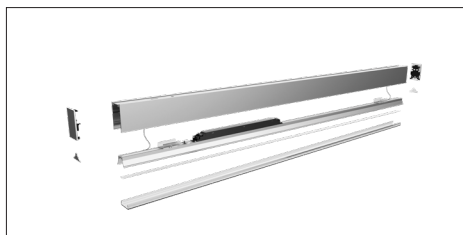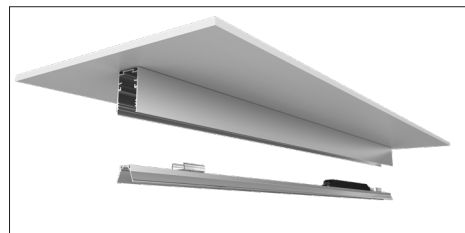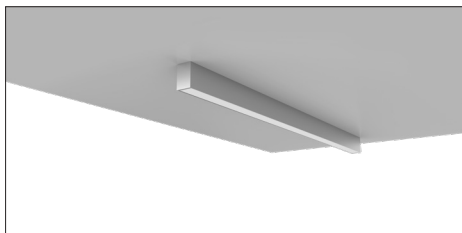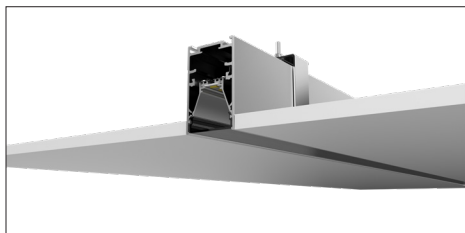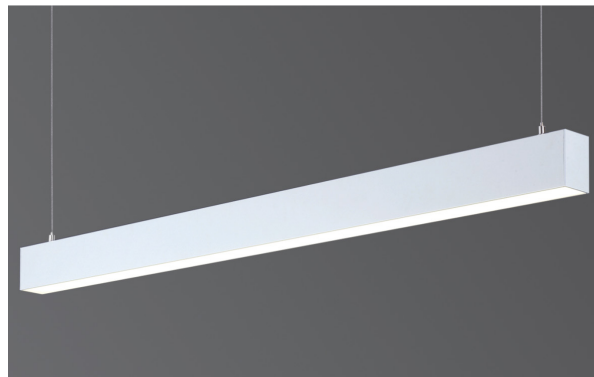


Model #	Length	Wattage	Distribution	Lumen Output
TechoLED-BX-2-D-2-18-30-U-D	2ft	18W	Direct	1800lm
TechoLED-BX-2-D-4-31-30-U-D	4ft	31W	Direct	3100lm
TechoLED-BX-2-D-6-46-30-U-D	6ft	46W	Direct	4600lm
TechoLED-BX-2-D-8-61-30-U-D	8ft	61W	Direct	6100lm
TechoLED-BX-2-DI-2-22-30-U-D	2ft	22W	Direct/Indirect	2200lm
TechoLED-BX-2-DI-4-44-30-U-D	4ft	44W	Direct/Indirect	4400lm
TechoLED-BX-2-DI-6-66-30-U-D	6ft	66W	Direct/Indirect	6600lm
TechoLED-BX-2-DI-8-89-30-U-D	8ft	89W	Direct/Indirect	8900lm

Project:	Type:
Date:	Comments:

Ordering
Guide

1 2 3 4 5 6 7 8 9 10




1-FIXTURE ID	2-DISTRIBUTION	3-LENGTH	4-WATTAGE	5-COLOR TEMPERATURE	
BX-2	D - Direct DI - Direct/Indirect	2 - 2ft 4 - 4ft 6 - 6ft 8 - 8ft C - Custom	Direct 18 - 18W (1800lm) 31 - 31W (3100lm) 46 - 46W (4600lm) 61 - 61W (6100lm) Direct/Indirect 22 - 22W (1800lm down/400lm up) 44 - 44W (3100lm down/1300lm up) 66 - 66W (4600lm down/2000lm up) 89 - 89 W (6100lm down/2800lm up) C - Custom Wattage/ Lumen Output	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K D - Dynamic/Tunable White DT - Lutron Digital T-Series Dynamic/Tunable white driver RGB - RGB RGBW - RGBW	
6-VOLTAGE	7-FINISH	8-MOUNTING	9-DRIVER OPTIONS	10-OPTIONS	11-OPTIONS (CONT.)
U - Universal 110-277V HV - 347V	S - Silver W - White B - Black C - C (RAL#)	P - Pendant S - Surface Mounted W - Wall Mounted R - Recessed TG - Recessed in T Grid Ceiling	D - 0-10V Dimming DA - Dali LDE1 - Lutron Hi-lume 1% EcoSystem, Soft-on, Fade- to-Black dimming	DFCSJ-OEM-RF - Lutron Vive In-Fixture control (RF only) FCJ/FCJS-ECO - Lutron wireless PowPak (EcoSys- tem) FCJ/FCJS-010 - Lutron RF PowPak (0-10V) DFCSJ-OEM-OCC - Lutron Vive In-Fixture control (with daylight & occ/vac sensors)	EM - Emergency Battery Backup (remote) M - Motion Sensor (remote) BM - Bluetooth Mesh Smart Wireless Control by BubblyNet

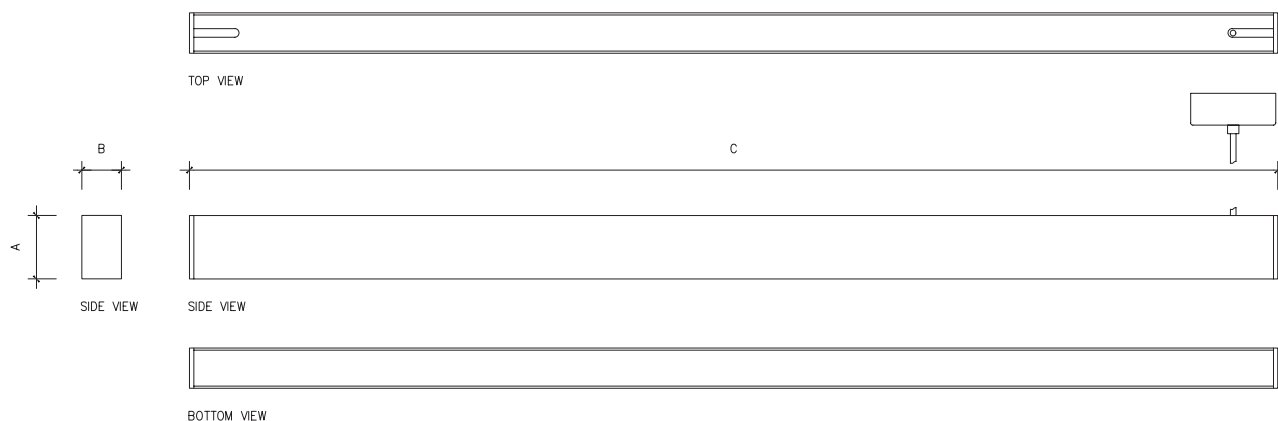

FIXTURE ID	A	B	C
TechoLED-BX-2-D-2-18-30-U-D	2.76"	2.17"	24"
TechoLED-BX-2-D-4-31-30-U-D	2.76"	2.17"	48"
TechoLED-BX-2-D-6-61-30-U-D	2.76"	2.17"	72"
TechoLED-BX-2-D-8-89-30-U-D	2.76"	2.17"	96"


FIXTURE ID	A	B	C
TechoLED-BX-2-DI-2-22-30-U-D	3.15"	2.17"	24"
TechoLED-BX-2-DI-4-44-30-U-D	3.15"	2.17"	48"
TechoLED-BX-2-DI-6-66-30-U-D	3.15"	2.17"	72"
TechoLED-BX-2-DI-8-89-30-U-D	3.15"	2.17"	96"

Project:	Type:
Date:	Comments:

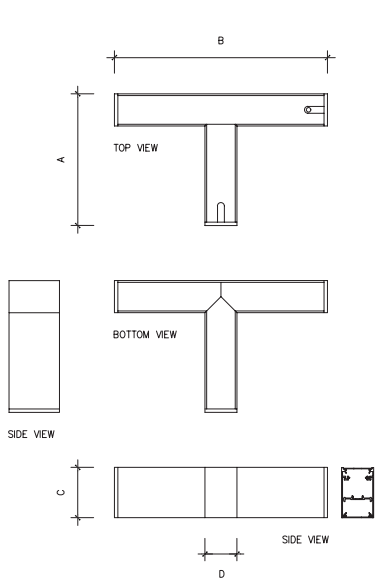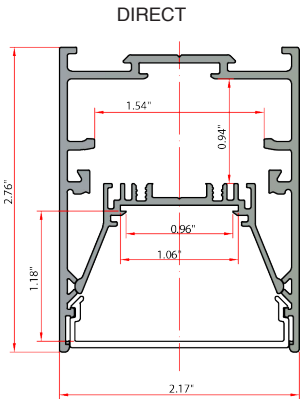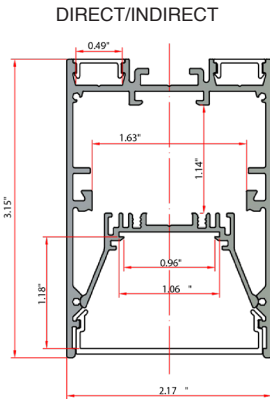


BX-2-L	Connector
A	25.08"
B	25.08"
C	2.76"
D	2.17"

Not to scale

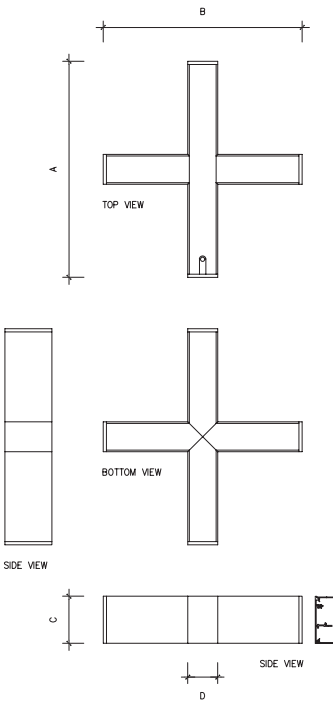

BX-2-X	Connector
A	25.08"
B	25.08"
C	2.76"
D	2.17"

Not to scale

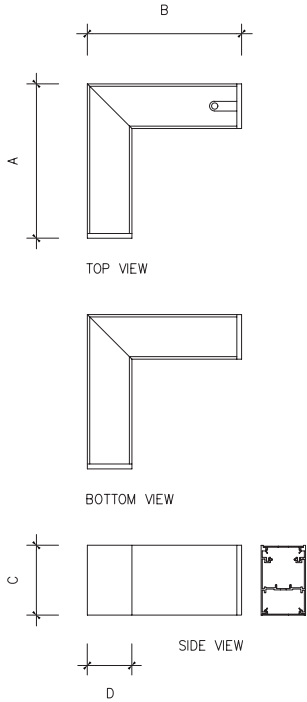


BX-2-T	Connector
A	25.08"
B	25.08"
C	2.76"
D	2.17"

Not to scale

Project:	Type:
Date:	Comments:

Photometrics

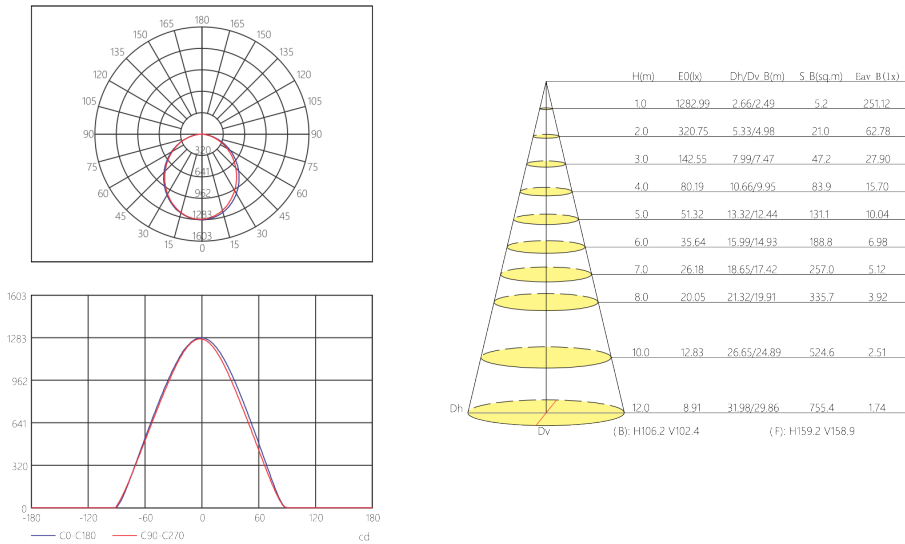

Connectors

BX-2-L	L shape connector (lit)
BX-2-T	T shape connector (lit)
BX-2-X	X shape connector (lit)
BX-2-C	Continuous linear run connector
BX-2-AC	Pendant hanging kit (aircraft cable)
BX-2-WM	Wall mounting hardware
BX-2-RG001	T Grid Celing

