

Project:	Type:
Date:	Comments:

GENERAL: Indoor Architectural LED Fixture, Pendant, Surface, Wall Mounted & Recessed Installations.

LED: Samsung LED Chips, 2700-5000K, Dynamic White and RGBW Available, 80CRI (90 optional)

OPTICAL: Direct Illumination, 15°, 30°, 45° Beam Angle Options & UGR<16 on Louvre Portion, UGR<19 on Solid Diffuser

CONSTRUCTION: High Grade Aluminum Extrusion 2.6x3.5" with Arrayed Louvre Diffuser, Die Cast End Caps, PMMA Diffuser, Intergral Driver, Powder Coat Finish.

* 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.




Model #	Length	Wattage	Distribution	Lumen Output
TechoLED-BX-3C-D-4-25-30-U-D	4 ft	25W	Direct	2400lm
TechoLED-BX-3C-D-6-40-30-U-D	6 ft	40W	Direct	3600lm
TechoLED-BX-3C-D-8-60-30-U-D	8 ft	60W	Direct	5700lm

Ordering
Guide

1 2 3 4 5 6 7 8 9 10


1-FIXTURE ID	2-DISTRIBUTION	3-LENGTH	4-WATTAGE	5-COLOR TEMPERATURE	6-BEAM ANGLE
BX-3C	D - Direct	4 - 4ft 6 - 6ft 8 - 8ft C - Custom	25 - 25W ^(2400lm) 40 - 40W ^(3600lm) 60 - 60W ^(5700lm) C - Custom Wattage /Lumen Output	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K D - Dynamic/Tunable White DT - Lutron Digital T-Series Dynamic/Tunable white driver RGB - RGB RGBW - RGBW	15 - 15° 30 - 30° 45 - 45°
7-VOLTAGE	8-FINISH	9-MOUNTING	10-DRIVER OPTIONS	11-OPTIONS	12-OPTIONS (CONT.)
U - Universal 110-277V HV - 347V	S - Silver W - White B - Black C - Custom (RAL#)	P - Pendant (aircraft cables) S - Surface Mount R - Recessed	D - 0-10V Dimming DA - Dali LDE1 - Lutron Hi-lume 1% EcoSystem, Soft-on, Fade- to-Black dimming	DFCSJ-OEM-RF - Lutron Vive In-Fixture control (RF only) FCJ/FCJS-ECO - Lutron wireless PowPak (EcoSys- tem) FCJ/FCJS-010 - Lutron RF PowPak (0-10V) DFCSJ-OEM-OCC - Lutron Vive In-Fixture control (with daylight & occ/vac sensors)	EM - Emergency Battery Backup (remote) M - Motion Sensor (remote) BM - Bluetooth Mesh Smart Wireless Control by BubblyNet

Project:	Type:
Date:	Comments:

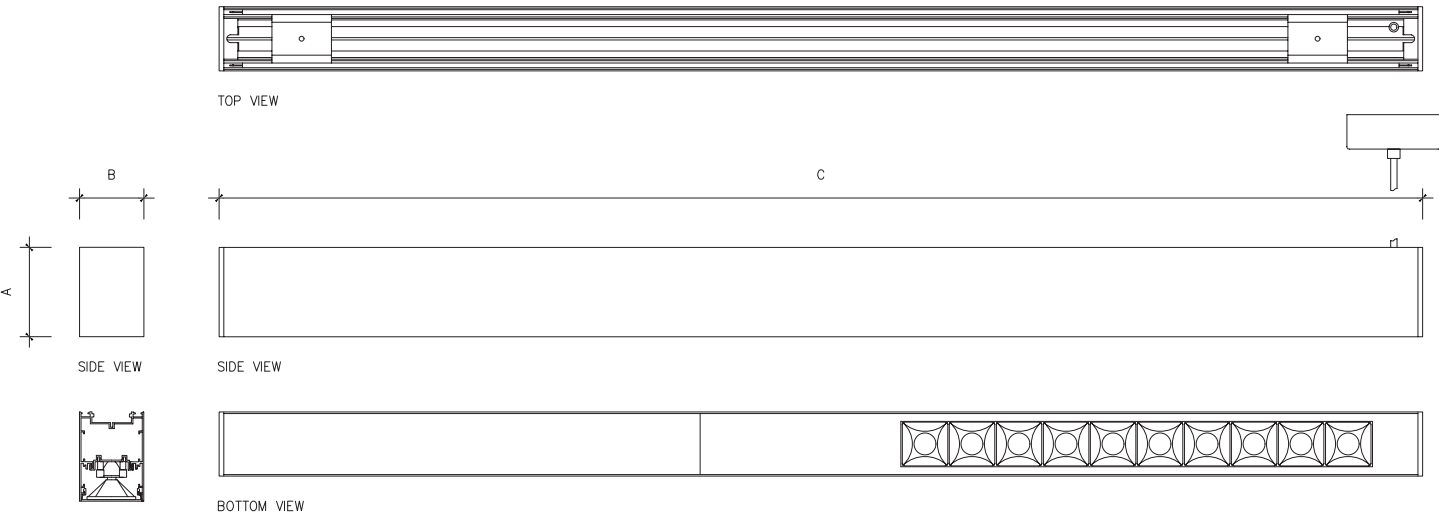


FIXTURE ID	A	B	C
TechoLED-BX-3C-D-4-25-30-U-D	3.5"	2.6"	48"
TechoLED-BX-3C-D-6-40-30-U-D	3.5"	2.6"	72"
TechoLED-BX-3C-D-8-60-30-U-D	3.5"	2.6"	96"

Configurations

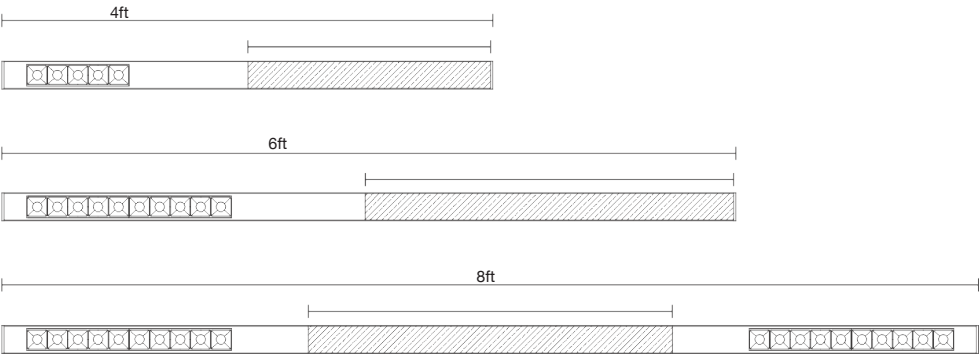

Project:	Type:
Date:	Comments:

Photometrics

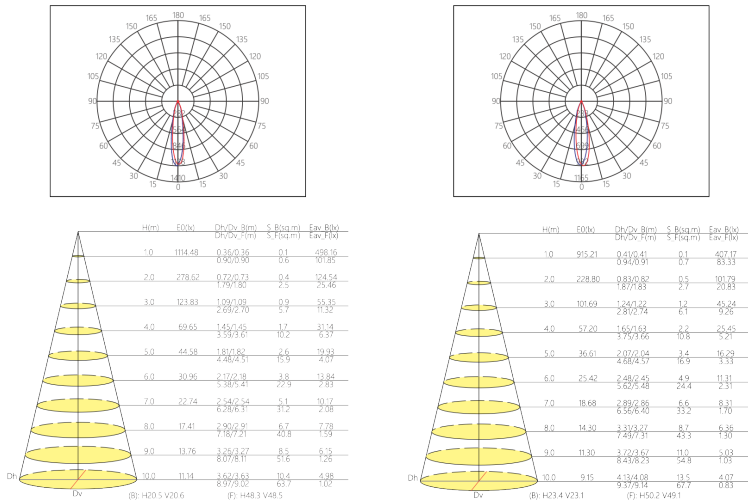

Accessories

BX-3LC-AC	Pendant hanging kit (aircraft cable)
-----------	--------------------------------------