

Project:	Type:
Date:	Comments:

SL1/SL2 Series

GENERAL: Indoor Architectural LED Fixture, Pendant, Wall Mounted & Recessed Installation.

LED: Samsung LED Chips, 2700-5000K, Tunable White, 83CRI (90 optional)

OPTICAL: Direct & Direct/Indirect Configuration, 110° Beam Angle

CONSTRUCTION: High Grade Aluminum Extrusion, Die Cast End Caps, PMMA Diffuser Integral Driver, Powder Coat Finish. Lit Corners Available for Smooth Seamless Patterns and Continuous Linear Runs.

* 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.



Model #	Size (inches)	Lumen	CRI	CCT	Driver	PF	Lifetime
TechoLED-SL-1-36-25-X	36 x 0.72 x 3.14	2000	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)
TechoLED-SL-1-36-30-X	36 x 0.72 x 3.14	2400	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)
TechoLED-SL-1-48-34-X	48 x 0.72 x 3.14	2720	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)
TechoLED-SL-1-48-40-X	48 x 0.72 x 3.14	3200	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)
TechoLED-SL-1-59-40-X	59 x 0.72 x 3.14	3200	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)
TechoLED-SL-2-36-25-X	36 x 0.78 x 3.7	2000	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)
TechoLED-SL-2-36-30-X	36 x 0.78 x 3.7	2400	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)
TechoLED-SL-2-48-34-X	48 x 0.78 x 3.7	2720	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)
TechoLED-SL-2-48-40-X	48 x 0.78 x 3.7	3200	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)
TechoLED-SL-2-59-40-X	59 x 0.78 x 3.7	3200	>83	3000k/4000k/5000k	Built in	> 0.95	50000 (h)

Ordering Guide

1 2 3 4 5 6 7 8 9

1-FIXTURE ID

TechoLED-SL-1
TechoLED-SL-2

2-LENGTH

36 - 36"
48 - 48"
59 - 59"
C - Custom (specify length)

3-WATTAGE

25 - 25W(2000lm)
30 - 30W(2400lm)
34 - 34W(2720lm)
40 - 40W(3200lm)

4-COLOR TEMPERATURE

27 - 2700K
30 - 3000K
35 - 3500K
40 - 4000K
50 - 5000K
D - Dynamic/Tunable White

5-FINISH

S - Silver
W - White
B - Black
C - Custom Color (Ral #)

6-VOLTAGE

U - 100-277V
HV - 347V

7-DRIVER OPTIONS

P - Pendant (aircraft cable)
R - Recessed
W - Wall Mounted

8-OPTIONS

D - 0-10V Dimming
DA - Dali
LDE1 - Lutron Hi-lume 1% EcoSystem, Soft-on, Fade-to-Black dimming

9-OPTIONS (CONT.)



DFCSJ-OEM-RF - Lutron Vive In-Fixture control (RF only)
FCJ/FCJS-ECO - Lutron wireless PowPak (EcoSystem)
FCJ/FCJS-010 - Lutron RF PowPak (0-10V)
DFCSJ-OEM-OCC - Lutron Vive In-Fixture control (with daylight & occ/vac sensors)

10-OPTIONS (CONT.)

EM - Emergency Battery Backup (remote)
M - Motion Sensor (remote)
BM - Bluetooth Mesh Smart Wireless Control by BubblyNet

As we continue to innovate and improve our products, we reserve the right to edit, modify, and change our technical documentation.

Project:	Type:
Date:	Comments:

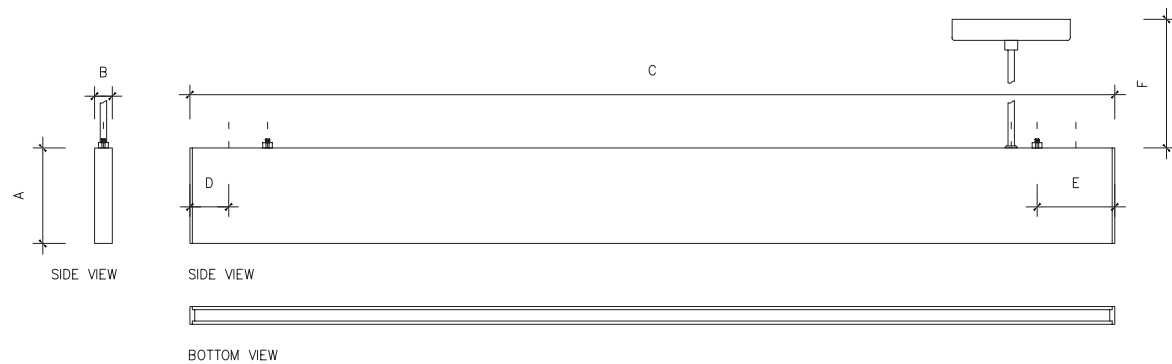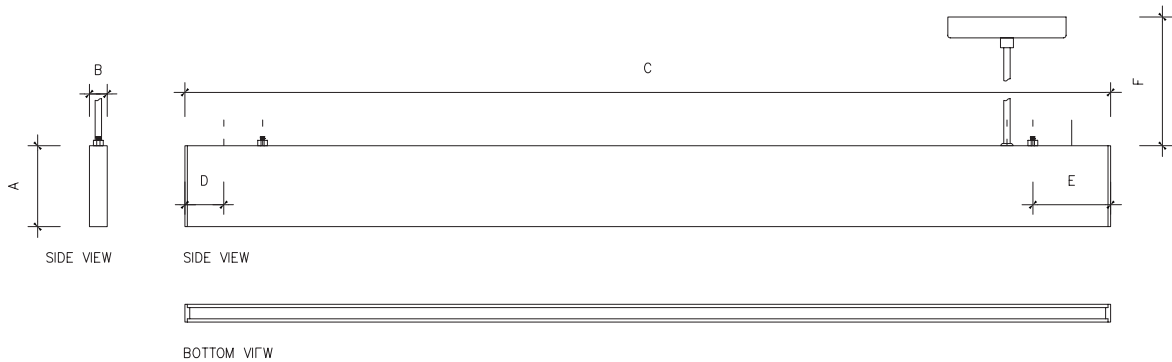

FIXTURE ID	A	B	C
TechoLED-SL-2-36-25-X	3.7	0.78	36
TechoLED-SL-2-36-30-X	3.7	0.78	36
TechoLED-SL-2-48-34-X	3.7	0.78	48
TechoLED-SL-2-48-40-X	3.7	0.78	49
TechoLED-SL-2-59-40-X	3.7	0.78	59

FIXTURE ID	A	B	C
TechoLED-SL-1-36-25-X	3.14	0.72	36
TechoLED-SL-1-36-30-X	3.14	0.72	36
TechoLED-SL-1-48-34-X	3.14	0.72	48
TechoLED-SL-1-48-40-X	3.14	0.72	48
TechoLED-SL-1-59-40-X	3.14	0.72	59



As we continue to innovate and improve our products, we reserve the right to edit, modify, and change our technical documentation.