

Project:	Type:
Date:	Comments:




GENERAL: Indoor Architectural LED Fixture. Concave shape with concealed illumination, anti-glare nano technology reflector. Pendant, Surface Mount and Recessed installation.

LED: Samsung LED Chips, 2700-5000K, Dynamic White and RGBW Available, 80CRI (90 optional)

OPTICAL: Direct & Direct/Indirect Configurations, 121° Beam Angle, UGR<19

CONSTRUCTION: High Grade Aluminum Extrusion, Die Cast End Caps, Nano-Technology Reflector, Integral Driver, Powder Coat Finish. Seamless Continuous Linear Runs available.

** 5-year warranty, 50,000 hour rated lifespan, IP40 (indoor). Custom size, lumen output and color temperature available.*

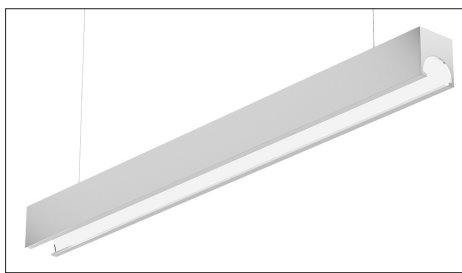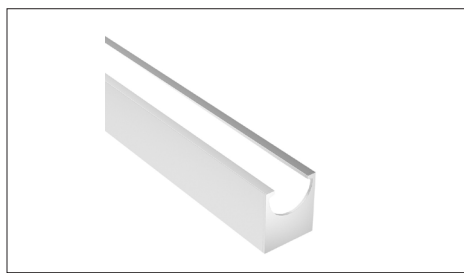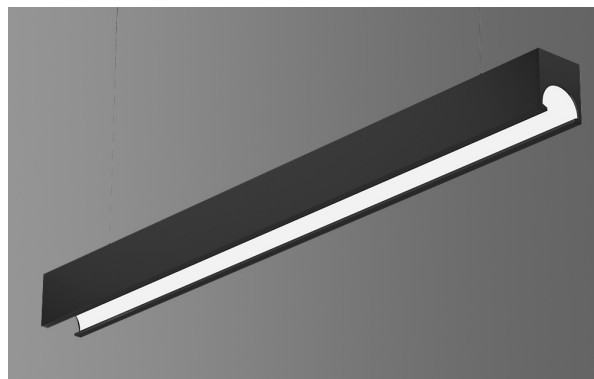

Model #	Length	Wattage	Distribution	Lumen Output
TechoLED-C-D-4-34-30-U-W-P-D	4ft	34W	Direct	3400lm
TechoLED-C-D-8-68-30-U-W-P-D	8ft	68W	Direct	6800lm
TechoLED-C-DI-4-45-30-U-W-P-D	4ft	45W	Direct/Indirect	4500lm
TechoLED-C-DI-8-90-30-U-W-P-D	8ft	90W	Direct/Indirect	9000lm



Project:	Type:
Date:	Comments:

Ordering Guide



1-FIXTURE ID	2-DISTRIBUTION	3-LENGTH	4-WATTAGE	5-COLOR TEMPERATURE	
C - Concave	D - Direct DI - Direct/Indirect	4 - 4ft 8 - 8ft C - Custom	Direct 34 - 34W 68 - 68W Direct/Indirect 45 - 45W (34 down / 11 up) 90 - 90W (67 down / 23 up) C - Custom Wattage/ Lumen Output	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K D - Dynamic/Tunable White DT - Lutron Digital T-Series Dynamic/Tunable white driver RGB - RGB RGBW - RGBW	
6-VOLTAGE	7-FINISH	8-MOUNTING	9-DRIVER OPTIONS	10-OPTIONS	11-OPTIONS (CONT.)
U - Universal 110-277V HV - 347V	S - Silver W - White B - Black C - C (RAL#)	P - Pendant S - Surface Mounted R - Recessed TG - Recessed in T Grid Ceiling	D - 0-10V Dimming DA - Dali LDE1 - Lutron Hi-lume 1% EcoSystem, Soft-on, Fade- to-Black dimming	DFCSJ-OEM-RF - Lutron Vive In-Fixture control (RF only) FCJ/FCJS-ECO - Lutron wireless PowPak (EcoSys- tem) FCJ/FCJS-010 - Lutron RF PowPak (0-10V) DFCSJ-OEM-OCC - Lutron Vive In-Fixture control (with daylight & occ/vac sensors)	EM - Emergency Battery Backup (remote) M - Motion Sensor (remote) BM - Bluetooth Mesh Smart Wireless Control by BubblyNet


DIMENSIONS

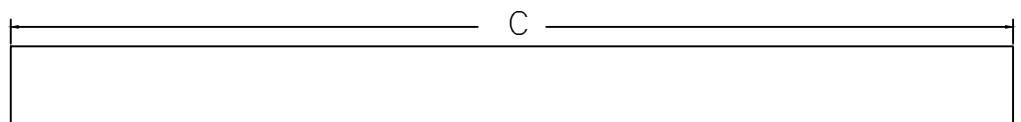

FIXTURE ID	A	B	C
TechoLED-C-D-4-34-30-U-W-P-D	3.9"	3.5"	48.5"
TechoLED-C-D-8-68-30-U-W-P-D	3.9"	3.5"	96.49"
TechoLED-C-DI-4-45-30-U-W-P-D	3.9"	3.5"	48.5"
TechoLED-C-DI-8-90-30-U-W-P-D	3.9"	3.5"	96.49"



Project:	Type:
Date:	Comments:

EXTRUSION DETAIL



PHOTOMETRICS

DIRECT DISTRIBUTION:

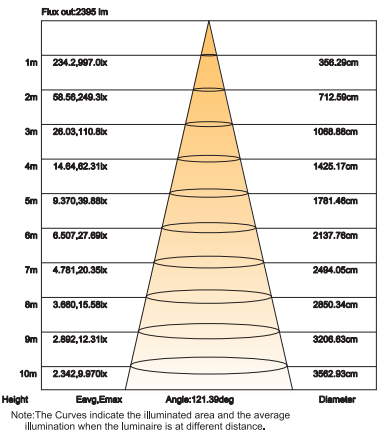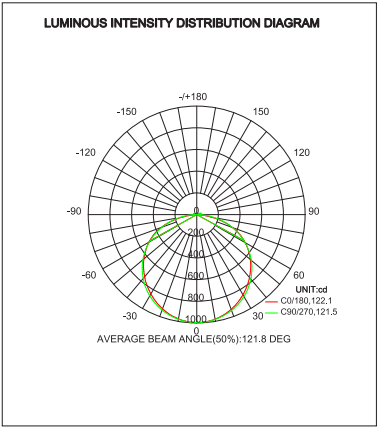

DIRECT/INDIRECT DISTRIBUTION

